

**Product
catalogue
2024**

“

Experience Mohawk Group
for groundbreaking products
that gratify harmony in
every corner while adding
grace to your space"

About Mohawk Group

Mohawk Group is the premium brand for commercial flooring solutions of Unilin within the EMEA market.

Step into the core of Mohawk Group, where commitment to innovation, well-being and design converge. Learn more about our structural strength and experience an approach that enhances the well-being of everyone connected through our commercial flooring solutions.



Grit Bruut Rupture 695

Carpet Tiles

The Collection

ART INTERVENTION

Creative Spark	06
Expansion Point	10
Blurred Edge	12

CONTOUR

Perspective	14
View	16

IMMERSION

Alternate	18
Liberate	20
Animate	22

IMPERFECTION

Grit	24
Bruut	26
Rupture	28

LIGHT ART

Flare	30
Reflect	32

PATTERN

Balanced	34
Tailored	36
Unchained	38

RUDIMENTS

Basalt	40
Jute	42
Teak	44
Clay	46
Clay Create	48
Metallic Clay	50

STEP UP

Step Up	52
---------	----



Multi Colour Mix

Creative Spark

Art Intervention

- Construction: tufted 1/10" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% solution dyed nylon
- Dimensions - m²/box: 50 x 50 cm - 5 m²
- Pile weight: ± 540 g/m²
- Pile thickness: ± 3,1 mm
- Total thickness: ± 6,3 mm
- Wear classification: 33 / LC1
- Fire classification: Bfl-s1
- Impact sound reduction: $\Delta L_w = 32$ dB
- Sound absorption: 0,15 α_w
- GUT-Prodís number: 3AA1D4DF

566	646	467	478
LRV: 2,41	LRV: 3,62	LRV: 6,73	LRV: 4,29
574	685	310	363
LRV: 5,67	LRV: 7,04	LRV: 5,82	LRV: 3,05
543	621	232	362
LRV: 6,67	LRV: 9,97	LRV: 12,32	LRV: 5,90
569	627	140	838
LRV: 6,21	LRV: 17,61	LRV: 31,36	LRV: 4,72

LRV = Light Reflectance Value according to BS 8493



646 □


□
848

□
685

□
911



989 LRV: 4,37



969 LRV: 12,73



419 LRV: 19,09




731 LRV: 25,98




979 LRV: 9,02



927 LRV: 19,80



854 LRV: 8,29



733 LRV: 18,39



904 LRV: 14,44



559 LRV: 13,16



848 LRV: 3,95




751 LRV: 20,99



911 LRV: 31,04



545 LRV: 23,51



998 LRV: 2,29




745 LRV: 9,95

Creative
Spark 621

Creative
Spark 646

Expansion
Point 621

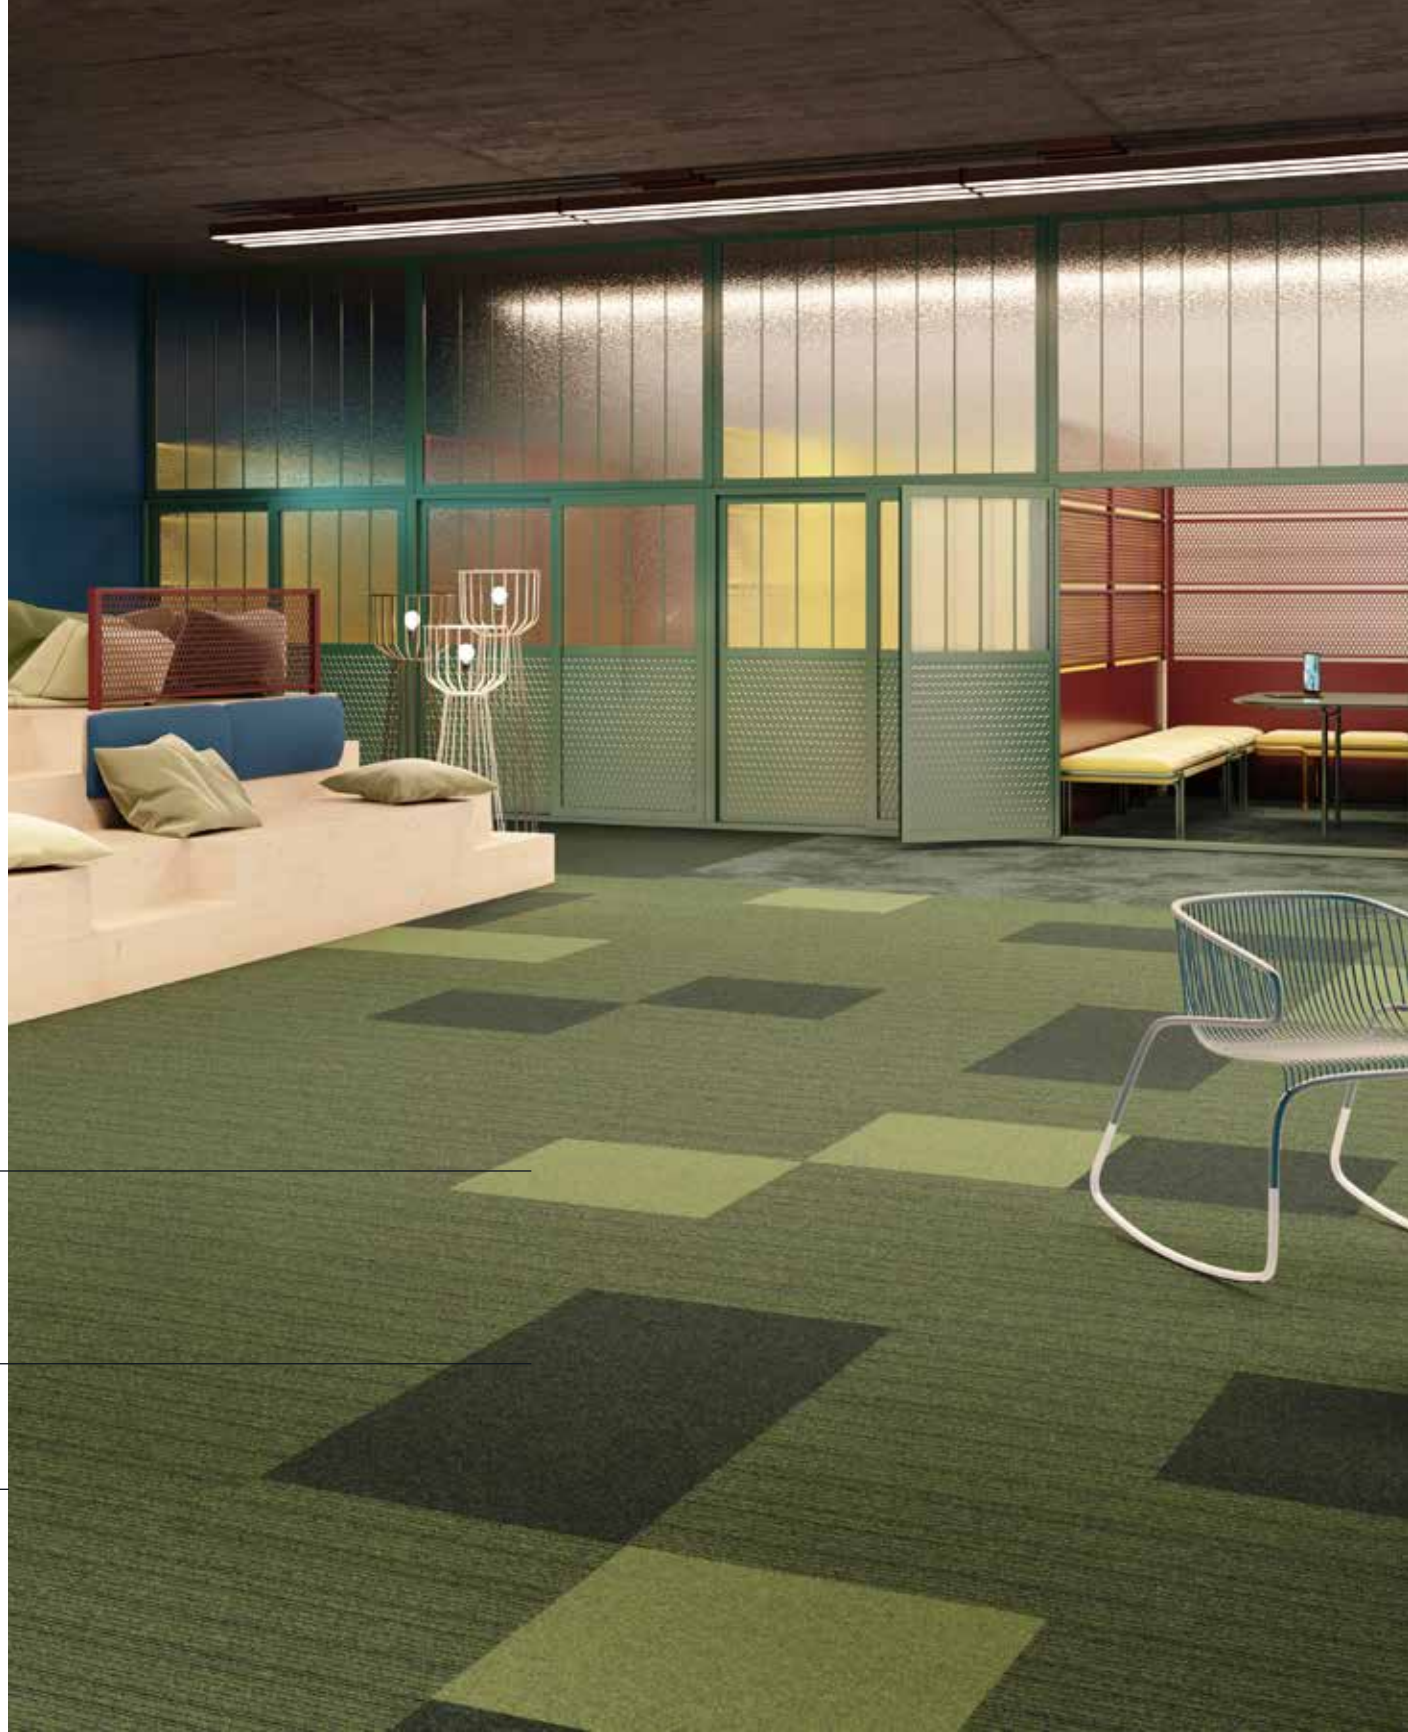

Expansion Point

Art Intervention

- Construction: tufted 1/10" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% solution dyed nylon
- Dimensions - m²/box: 50 x 50 cm - 5 m²
- Pile weight: ± 540 g/m²
- Pile thickness: ± 3,3 mm
- Total thickness: ± 6,6 mm
- Wear classification: 33 / LC21
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 27 dB
- Sound absorption: 0,15 αw
- GUT-Prodís number: F6619831



575 LRV: 3,74 - L 23,93



478 LRV: 5,10 - L 26,87



363 LRV: 4,20 - L 24,31



273 LRV: 8,25 - L 33,13



621 LRV: 5,97 - L 29,64



987 LRV: 5,77 - L 29,28




979 LRV: 3,51 - L 22,39



838 LRV: 3,38 - L 21,67



972 LRV: 11,13 - L 29,64



911 LRV: 19,47 - L 50,74




975 LRV: 20,77 - L 53,00



743 LRV: 16,44 - L 46,02


LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space

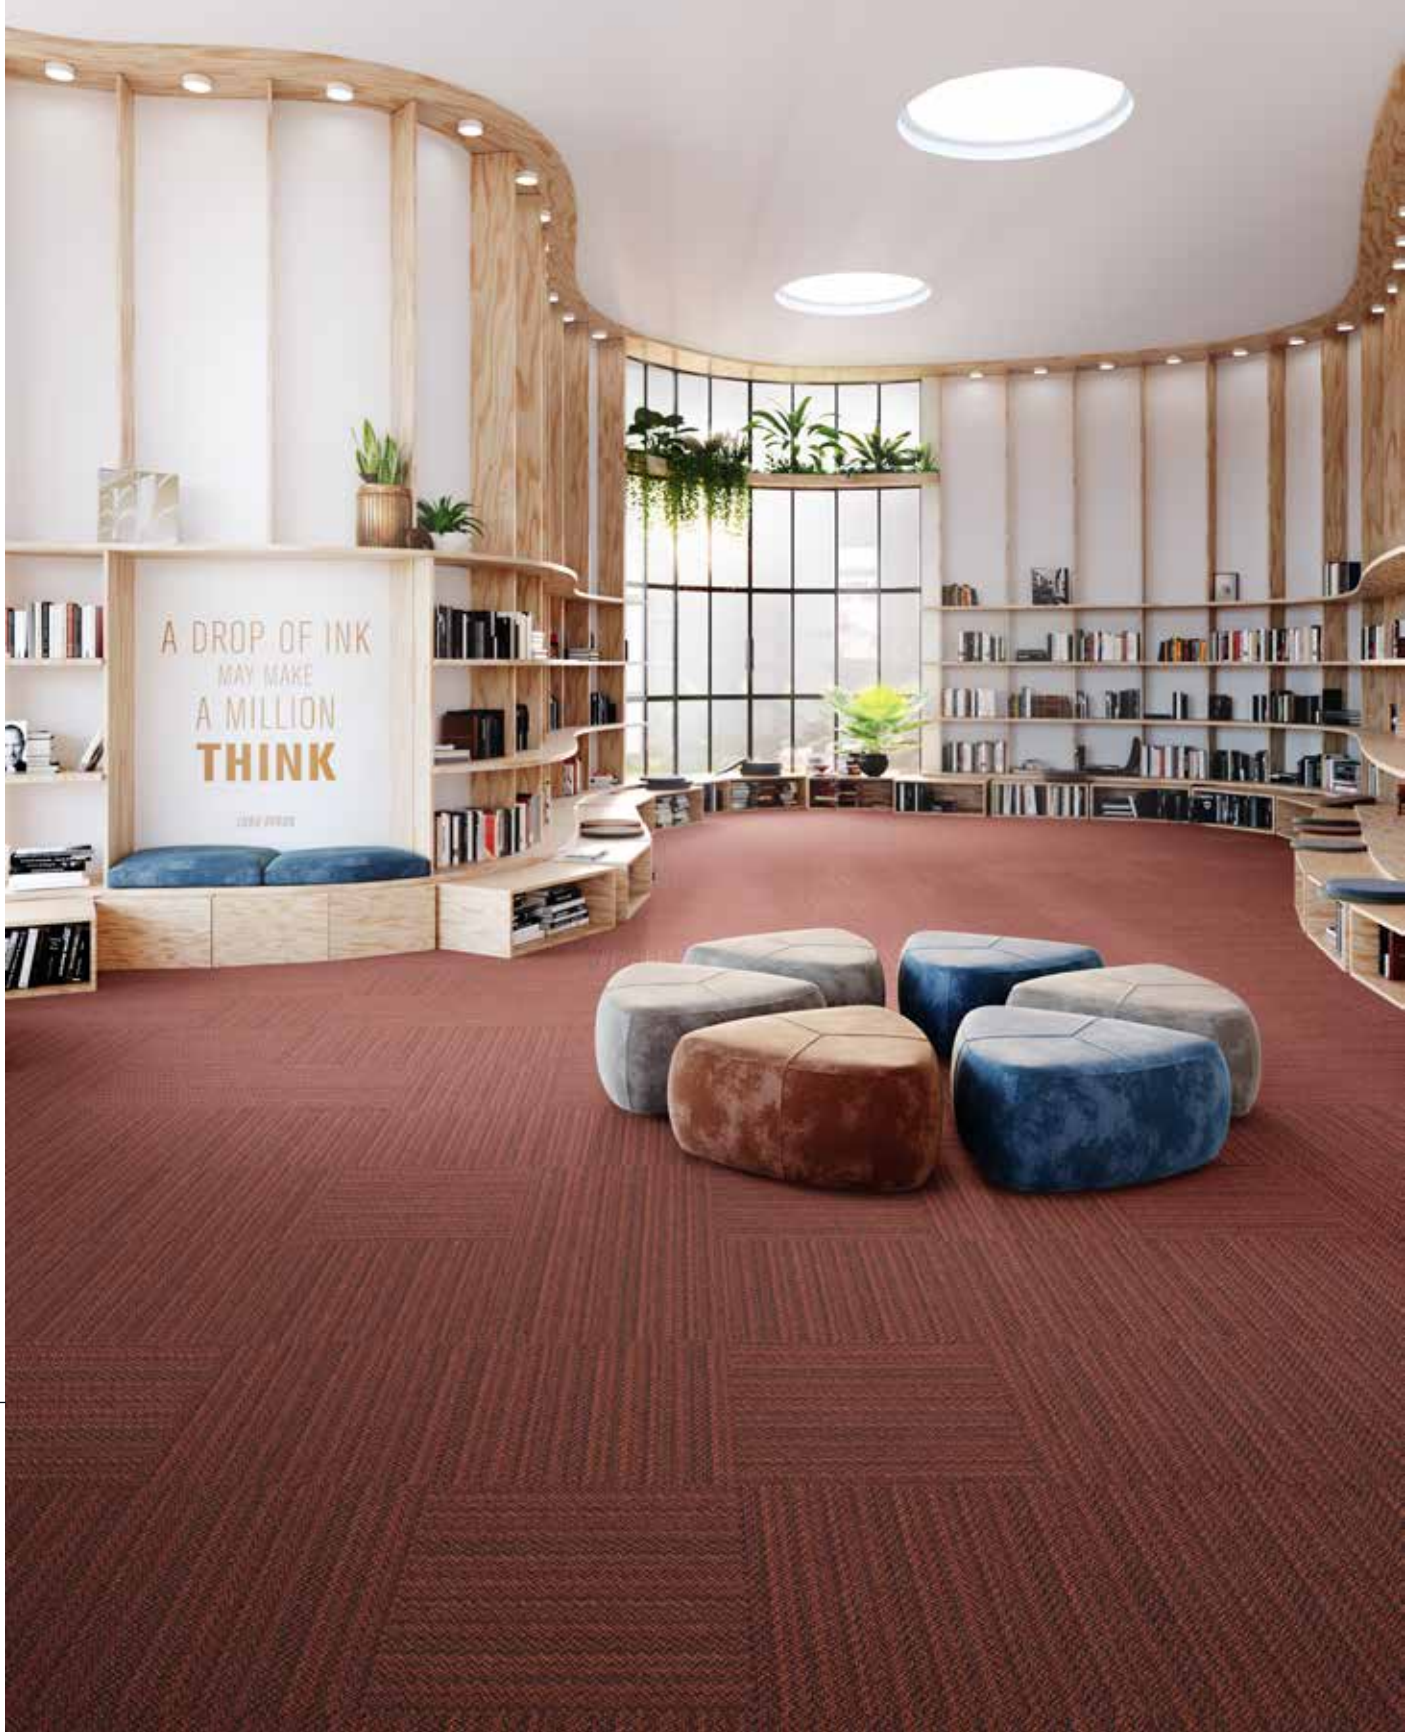


Blurred Edge

Art Intervention


- Construction: tufted 1/10" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% solution dyed nylon
- Dimensions - m²/box: 50 x 50 cm - 5 m²
- Pile weight: ± 540 g/m²
- Pile thickness: ± 2,5 mm
- Total thickness: ± 6,6 mm
- Wear classification: 33 / LC11
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 25 dB
- Sound absorption: 0,15 αw
- GUT-Prodís number: Ongoing




911 LRV: 17,78 - L 47,80



979 LRV: 5,08 - L 26,12



987 LRV: 8,18 - L 36,46



559 LRV: 13,19 - L 43,24




569 LRV: 6,37 - L 29,36



685 LRV: 4,11 - L 24,84



733 LRV: 15,59 - L 46,41



854 LRV: 8,74 - L 36,79



848 LRV: 5,35 - L 28,54



362 LRV: 4,06 - L 22,41


LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space



Perspective

Contour

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% solution dyed nylon
- Dimensions - m²/box: 50 x 50 cm - 5 m²
- Pile weight: ± 600 g/m²
- Pile thickness: ± 3,1 mm
- Total thickness: ± 6,4 mm
- Wear classification: 33 / LC1
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 25 dB
- Sound absorption: 0,15 αw
- GUT-Prodís number: 6119BCAA



478 LRV: 5,26 - L 27,47



575 LRV: 4,20 - L 24,31



621 LRV: 6,08 - L 29,61



848 LRV: 7,79 - L 33,47



975 LRV: 23,07 - L 55,15



911 LRV: 22,47 - L 54,53



959 LRV: 7,31 - L 32,50



989 LRV: 3,22 - L 20,91

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space



989 □
959 □

View

Contour

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% solution dyed nylon
- Dimensions - m²/box: 50 x 50 cm - 5 m²
- Pile weight: ± 600 g/m²
- Pile thickness: ± 3,1 mm
- Total thickness: ± 6,4 mm
- Wear classification: 33 / LC1
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 25 dB
- Sound absorption: 0,15 αw
- GUT-Prodís number: CAC6CFE5



478 LRV: 5,75 - L 28,78



575 LRV: 4,87 - L 26,35



621 LRV: 6,59 - L 30,85




848 LRV: 6,49 - L 30,62



975 LRV: 23,86 - L 55,95



911 LRV: 23,07 - L 55,15




959 LRV: 7,81 - L 33,59



989 LRV: 2,92 - L 19,72

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space

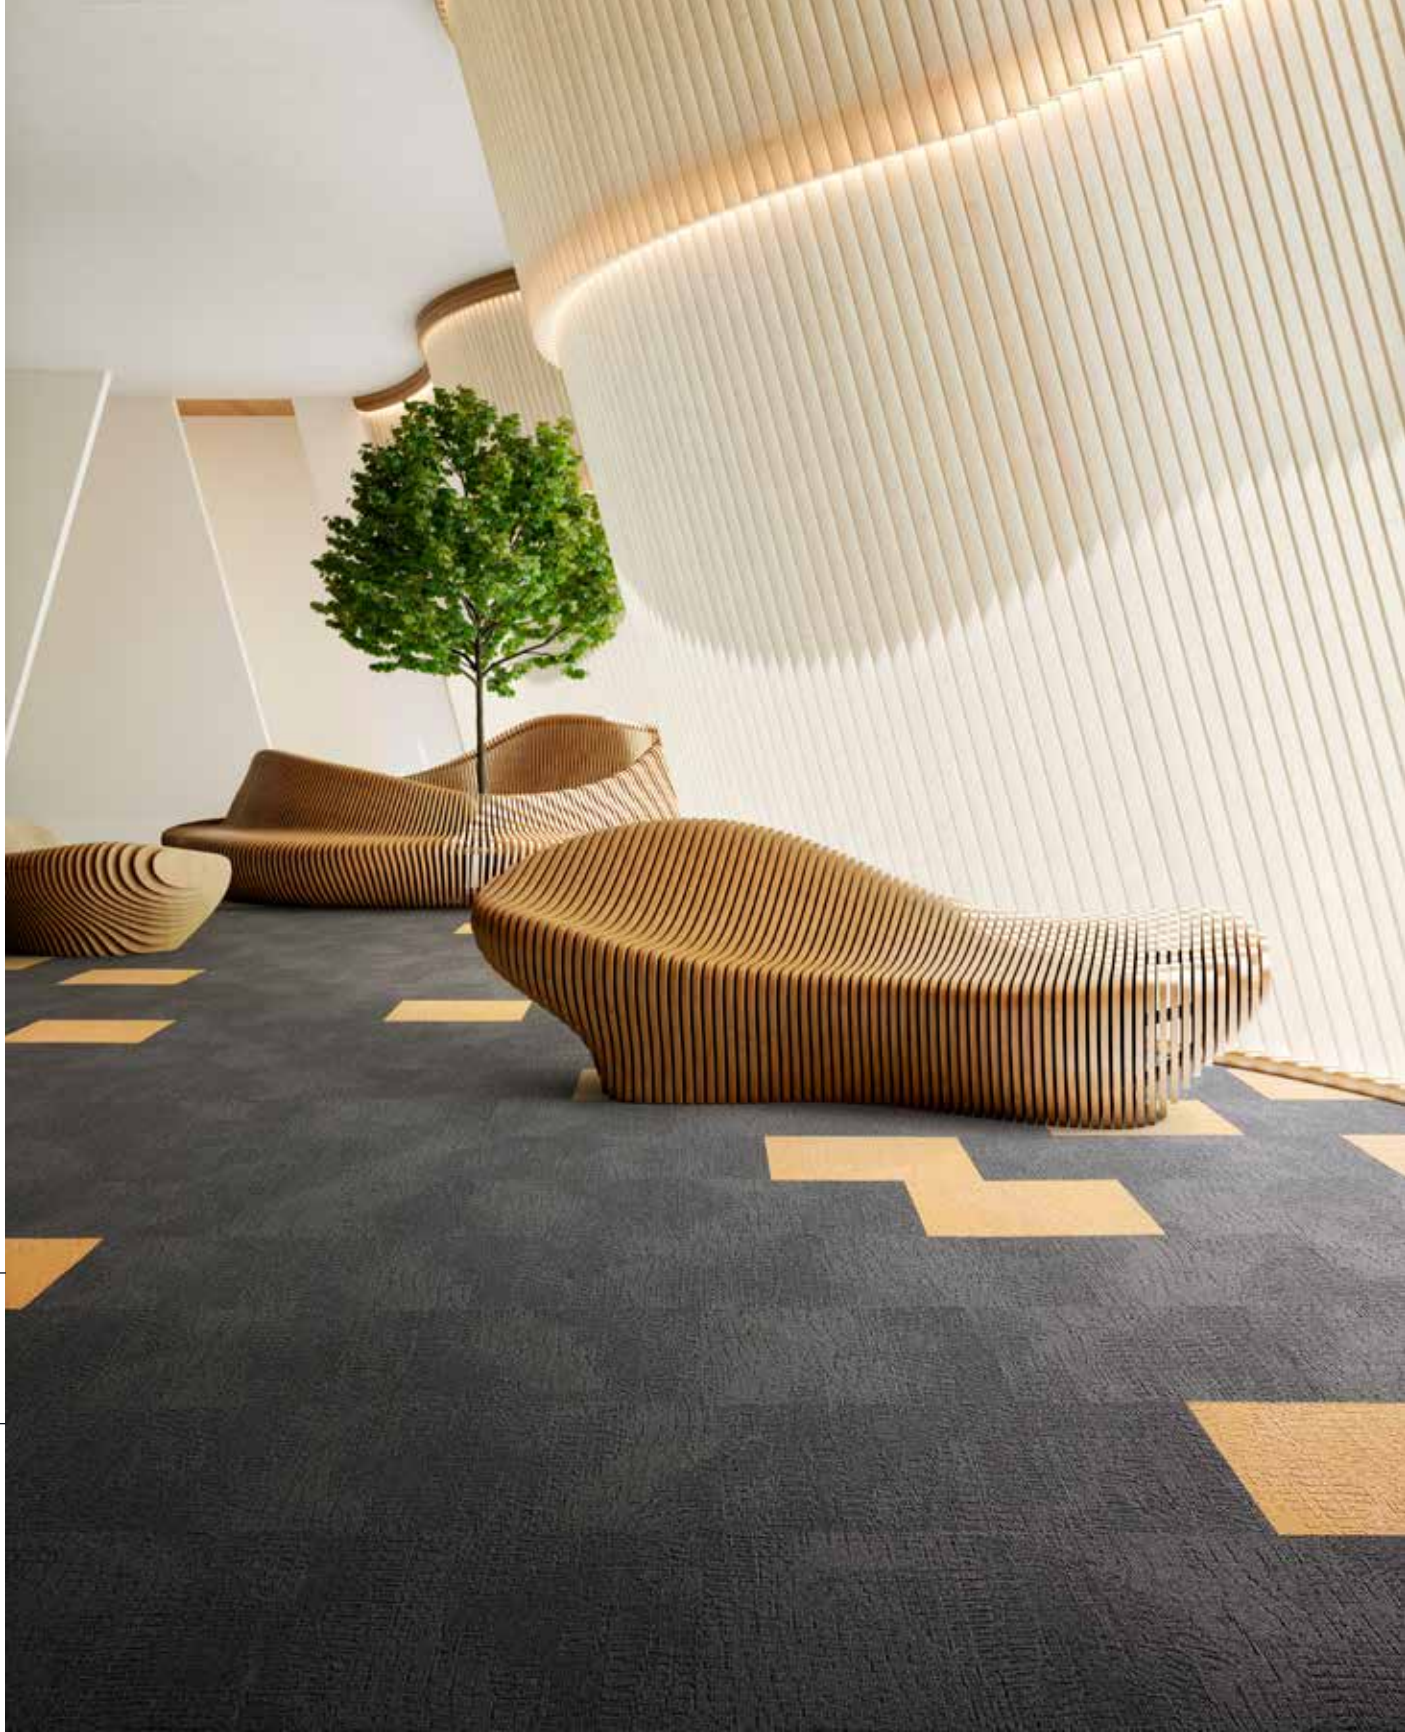

Alternate

Immersion

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% SDN Thrive® Matter
- Dimensions - m²/box: 50 x 50 cm - 4,5 m²
- Pile weight: ± 700 g/m²
- Pile thickness: ± 3,4 mm
- Total thickness: ± 7,0 mm
- Wear classification: 33 / LC2
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 24 dB
- Sound absorption: 0,15 αw
- GUT-Prodís number: Ongoing



140 LRV: 41,01 - L 70,19



232 LRV: 28,95 - L 60,74



467 LRV: 6,77 - L 31,29



474 LRV: 6,16 - L 29,81



574 LRV: 10,84 - L 39,31



621 LRV: 5,32 - L 27,64



699 LRV: 3,52 - L 22,02



543 LRV: 3,74 - L 22,80



545 LRV: 18,01 - L 49,51



911 LRV: 25,49 - L 57,55



969 LRV: 16,01 - L 46,99



559 LRV: 10,89 - L 39,40



731 LRV: 24,64 - L 56,72



904 LRV: 14,51 - L 44,96



979 LRV: 11,31 - L 40,09



989 LRV: 5,74 - L 28,75



569 LRV: 5,59 - L 28,36



848 LRV: 4,55 - L 25,42



- 621
- 699
- 559
- 545
- 569

Liberate

Immersion

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% SDN Thrive® Matter
- Dimensions - m²/box: 50 x 50 cm - 4,5 m²
- Pile weight: ± 700 g/m²
- Pile thickness: ± 3,3 mm
- Total thickness: ± 7,3 mm
- Wear classification: 33 / LC2
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 25 dB
- Sound absorption: 0,15 αw
- GUT-Prodís number: Ongoing

140	232	467	474
LRV: 41,01 - L 70,19	LRV: 28,95 - L 60,74	LRV: 6,77 - L 31,29	LRV: 6,16 - L 29,81
574	621	699	543
LRV: 10,84 - L 39,31	LRV: 5,32 - L 27,64	LRV: 3,52 - L 22,02	LRV: 3,74 - L 22,80
545	911	969	559
LRV: 18,01 - L 49,51	LRV: 25,49 - L 57,55	LRV: 16,01 - L 46,99	LRV: 10,89 - L 39,40
731	904	979	989
LRV: 24,64 - L 56,72	LRV: 14,51 - L 44,96	LRV: 11,31 - L 40,09	LRV: 5,74 - L 28,75
		569	848
		LRV: 5,59 - L 28,36	LRV: 4,55 - L 25,42

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space





Multi Colour Mix


Animate

Immersion

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% SDN Thrive® Matter
- Dimensions - m²/box: 50 x 50 cm - 4,5 m²
- Pile weight: ± 700 g/m²
- Pile thickness: ± 3,3 mm
- Total thickness: ± 7,2 mm
- Wear classification: 33 / LC2
- Fire classification: Bfl-s1
- Impact sound reduction: $\Delta L_w = 24$ dB
- Sound absorption: 0,15 α_w
- GUT-Prodix number: Ongoing

							
140	LRV: 41,01 - L 70,19	232	LRV: 28,95 - L 60,74	467	LRV: 6,77 - L 31,29	474	LRV: 6,16 - L 29,81
							
574	LRV: 10,84 - L 39,31	621	LRV: 5,32 - L 27,64	699	LRV: 3,52 - L 22,02	543	LRV: 3,74 - L 22,80
							
545	LRV: 18,01 - L 49,51	911	LRV: 25,49 - L 57,55	969	LRV: 16,01 - L 46,99	559	LRV: 10,89 - L 39,40
							
731	LRV: 24,64 - L 56,72	904	LRV: 14,51 - L 44,96	979	LRV: 11,31 - L 40,09	989	LRV: 5,74 - L 28,75
							
		569	LRV: 5,59 - L 28,36	848	LRV: 4,55 - L 25,42		

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space

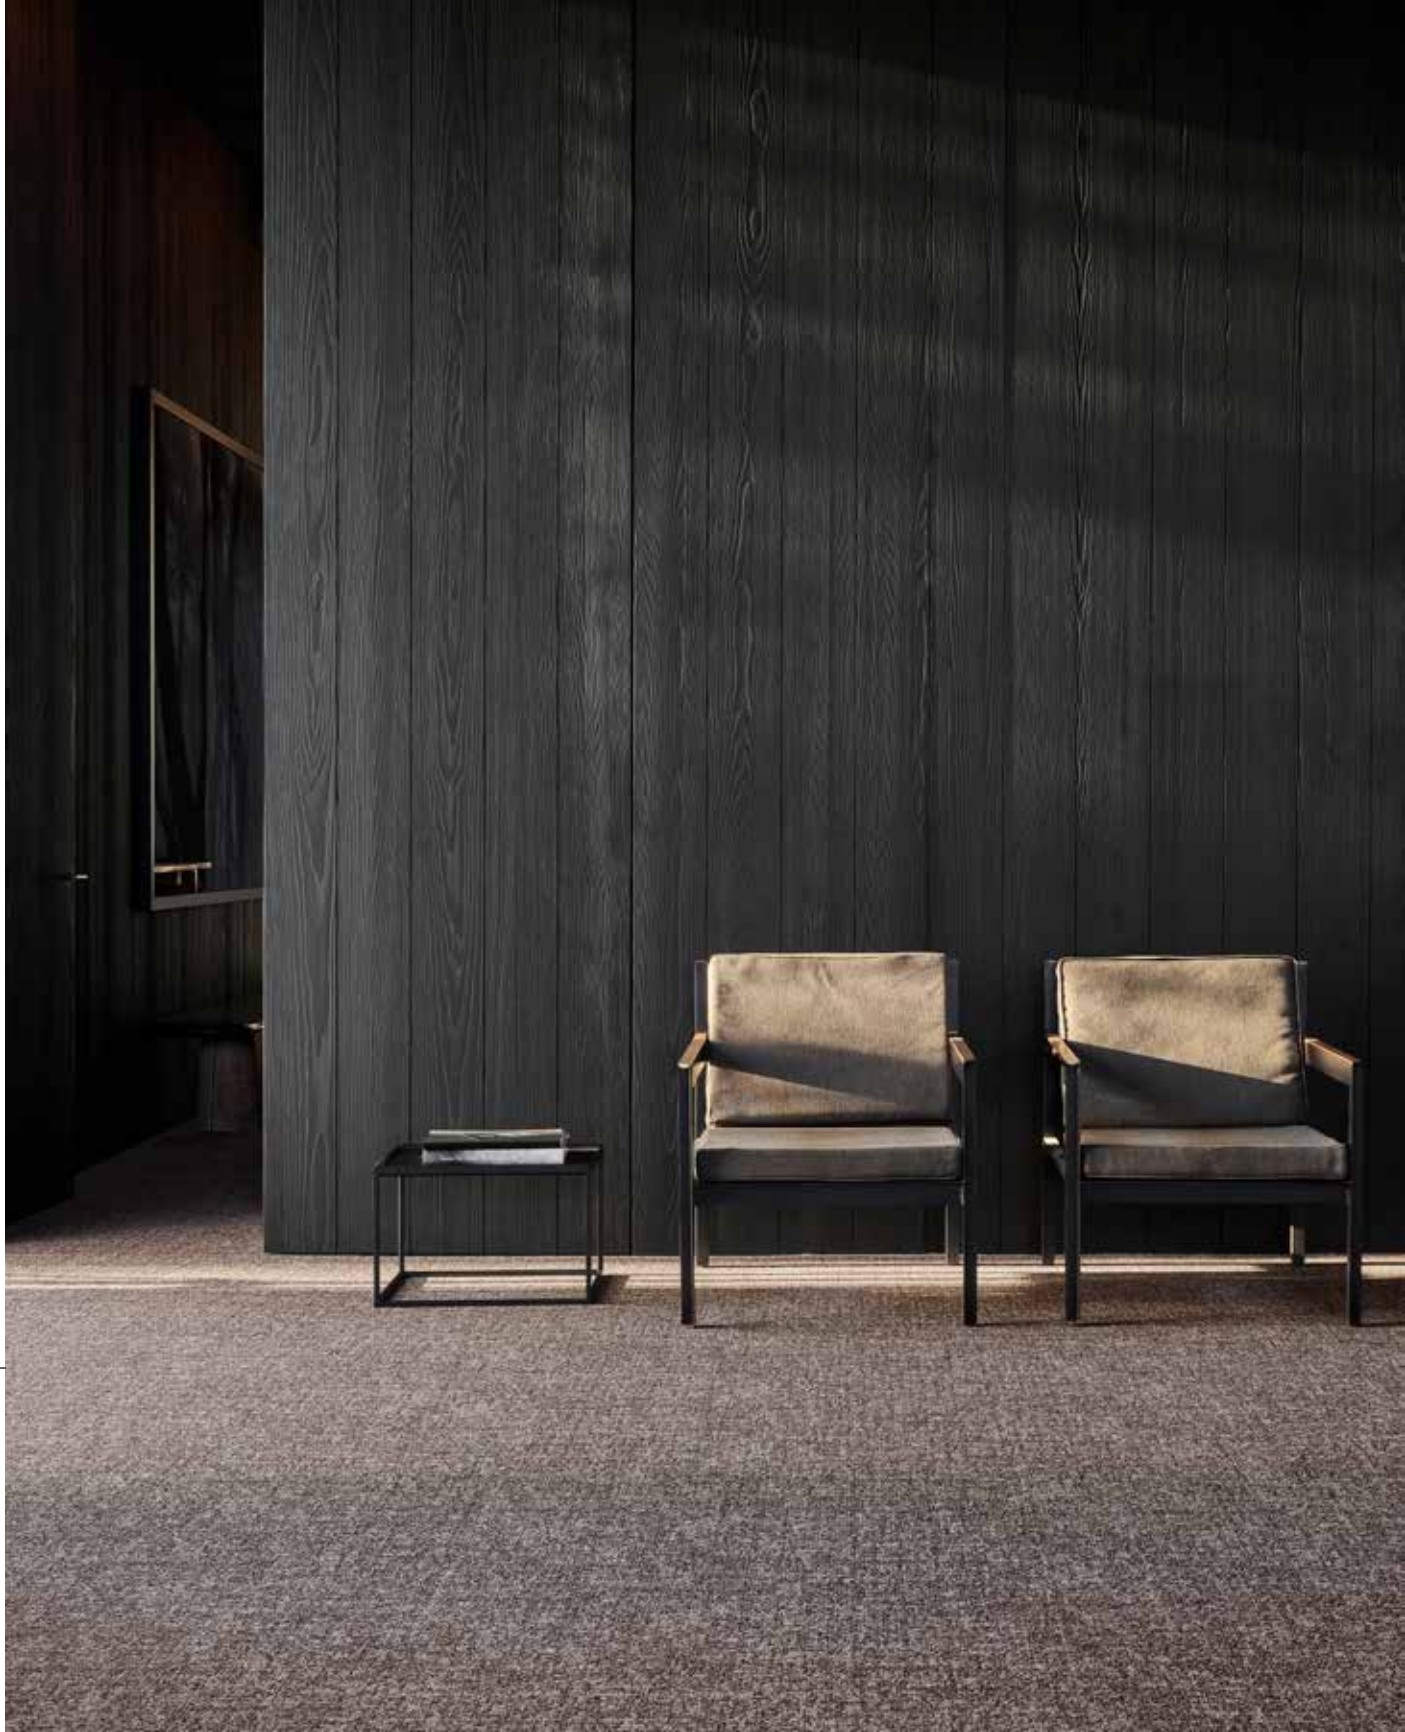

Grit

Imperfection

- Construction: 1/12" Pattern Perfect®
- Backing: EcoFlex™ Echo (94% recycled felt)
- Pile material: ECONYL® - 100% regenerated nylon
- Dimensions - m²/box: 25 x 100 cm - 4 m²
- Pile weight: ± 750 g/m²
- Pile thickness: ± 3,2 mm
- Total thickness: ± 8,6 mm
- Wear classification: 33 / LC2
- Fire classification: Bfl-s1
- Impact sound reduction: $\Delta L_w = 29$ dB
- Sound absorption: 0,25 α_w
- GUT-Prodís number: Ongoing



975 LRV: 21,33 - L 53,31



751 LRV: 30,19 - L 61,82



911 LRV: 20,27 - L 52,14



733 LRV: 15,13 - L 45,81



545 LRV: 21,83 - L 53,85



685 LRV: 11,20 - L 39,91



569 LRV: 10,31 - L 38,40



969 LRV: 9,67 - L 37,24



959 LRV: 7,69 - L 33,37



745 LRV: 11,36 - L 40,17



989 LRV: 5,30 - L 27,59



838 LRV: 3,05 - L 20,23

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space

969 □
989 □



Bruut

Imperfection

- Construction: 1/12" Pattern Perfect®
- Backing: EcoFlex™ Echo (94% recycled felt)
- Pile material: ECONYL® - 100% regenerated nylon
- Dimensions - m²/box: 25 x 100 cm - 4 m²
- Pile weight: ± 780 g/m²
- Pile thickness: ± 3,3 mm
- Total thickness: ± 8,7 mm
- Wear classification: 33 / LC2
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 31 dB
- Sound absorption: 0,30 αw
- GUT-Prodís number: Ongoing



975 LRV: 25,80 - L 57,85



911 LRV: 23,52 - L 55,61



545 LRV: 25,29 - L 57,36



569 LRV: 11,70 - L 40,74



959 LRV: 9,49 - L 36,91



989 LRV: 4,68 - L 25,79



751 LRV: 34,14 - L 65,07



733 LRV: 16,00 - L 46,97



685 LRV: 12,85 - L 42,53



969 LRV: 11,42 - L 40,27



745 LRV: 11,77 - L 40,85



838 LRV: 3,48 - L 21,88

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space

Rupture 989

Bruut 989

Grit 989



Rupture

Imperfection

- Construction: 1/12" Pattern Perfect®
- Backing: EcoFlex™ Echo (94% recycled felt)
- Pile material: ECONYL® - 100% regenerated nylon
- Dimensions - m²/box: 25 x 100 cm - 4 m²
- Pile weight: ± 780 g/m²
- Pile thickness: ± 3,3 mm
- Total thickness: ± 8,7 mm
- Wear classification: 33 / LC2
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 30 dB
- Sound absorption: 0,30 αw
- GUT-Prodís number: Ongoing



975 LRV: 23,55 - L 55,63



911 LRV: 21,49 - L 53,48



545 LRV: 25,02 - L 57,09



569 LRV: 11,23 - L 39,97



959 LRV: 9,02 - L 36,02



989 LRV: 5,23 - L 27,38



751 LRV: 33,07 - L 64,22



733 LRV: 15,51 - L 46,32



685 LRV: 12,32 - L 41,72



969 LRV: 11,58 - L 40,54



745 LRV: 12,97 - L 42,72



838 LRV: 5,64 - L 28,49

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space



419



614



569



559



627



703



731



733



714



935



927



979

Flare

Light Art

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% solution dyed nylon
- Dimensions - m²/box: 50 x 50 cm - 5 m²
- Pile weight: ± 540 g/m²
- Pile thickness: ± 3,0 mm
- Total thickness: ± 6,3 mm
- Wear classification: 33 / LC1
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 24 dB
- Sound absorption: 0,15 αw
- GUT-Prodís number: Ongoing



733

Reflect

Light Art

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% solution dyed nylon
- Dimensions - m²/box: 50 x 50 cm - 5 m²
- Pile weight: ± 540 g/m²
- Pile thickness: ± 3,0 mm
- Total thickness: ± 6,1 mm
- Wear classification: 33 / LC1
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 24 dB
- Sound absorption: 0,15 αw
- GUT-Prodís number: Ongoing



419



614



569



559



627



703



731



733



714



935



927



979



Balanced

Pattern

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% SDN Thrive® Matter
- Dimensions - m²/box: 50 x 50 cm - 4,5 m²
- Pile weight: ± 720 g/m²
- Pile thickness: ± 3,5 mm
- Total thickness: ± 7,0 mm
- Wear classification: 33 / LC2
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 25 dB
- Sound absorption: 0,20 αw
- GUT-Prodís number: Ongoing

383	419	468	542
LRV: 17,40	LRV: 26,27	LRV: 16,24	LRV: 15,53
545	559	569	627
LRV: 13,95	LRV: 8,88	LRV: 4,08	LRV: 23,73
656	731	848	904
LRV: 15,60	LRV: 28,94	LRV: 9,79	LRV: 20,08
911	969	979	989
LRV: 32,63	LRV: 21,51	LRV: 11,27	LRV: 4,38

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space



911 □
468 □
969 □

Tailored

Pattern

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% SDN Thrive® Matter
- Dimensions - m²/box: 50 x 50 cm - 4,5 m²
- Pile weight: ± 720 g/m²
- Pile thickness: ± 3,7 mm
- Total thickness: ± 6,9 mm
- Wear classification: 33 / LC2
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 25 dB
- Sound absorption: 0,20 aw
- GUT-Prodix number: Ongoing

383 LRV: 17,40	419 LRV: 26,27	468 LRV: 16,24	542 LRV: 15,53
545 LRV: 13,95	559 LRV: 8,88	569 LRV: 4,08	627 LRV: 23,73
656 LRV: 15,60	731 LRV: 28,94	848 LRV: 9,79	904 LRV: 20,08
911 LRV: 32,63	969 LRV: 21,51	979 LRV: 11,27	989 LRV: 4,38



LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space



Unchained

Pattern

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% SDN Thrive® Matter
- Dimensions - m²/box: 50 x 50 cm - 4,5 m²
- Pile weight: ± 720 g/m²
- Pile thickness: ± 3,4 mm
- Total thickness: ± 7,1 mm
- Wear classification: 33 / LC2
- Fire classification: Bfl-s1
- Impact sound reduction: $\Delta L_w = 25$ dB
- Sound absorption: 0,20 α_w
- GUT-Prodís number: Ongoing

							
383	LRV: 17,40	419	LRV: 26,27	468	LRV: 16,24	542	LRV: 15,53
							
545	LRV: 13,95	559	LRV: 8,88	569	LRV: 4,08	627	LRV: 23,73
							
656	LRV: 15,60	731	LRV: 28,94	848	LRV: 9,79	904	LRV: 20,08
							
911	LRV: 32,63	969	LRV: 21,51	979	LRV: 11,27	989	LRV: 4,38

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space



Basalt

Rudiments

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% solution dyed nylon
- Dimensions - m²/box: 50 x 50 cm - 5 m²
- Pile weight: ± 600 g/m²
- Pile thickness: ± 3,1 mm
- Total thickness: ± 6,4 mm
- Wear classification: 33 / LC1
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 28 dB
- Sound absorption: 0,15 αw
- GUT-Prodís number: 65EB708B

			
363 LRV: 4,25	273 LRV: 9,24	159 LRV: 27,58	685 LRV: 5,45
			
989 LRV: 3,36	848 LRV: 5,84	789 LRV: 16,58	975 LRV: 21,79
			
959 LRV: 6,99	569 LRV: 7,31	545 LRV: 16,41	911 LRV: 18,20

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space





959 □
989 □
159 □

Jute

Rudiments

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% solution dyed nylon
- Dimensions - m²/box: 50 x 50 cm - 5 m²
- Pile weight: ± 600 g/m²
- Pile thickness: ± 3,2 mm
- Total thickness: ± 6,4 mm
- Wear classification: 33 / LC2
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 28 dB
- Sound absorption: 0,15 αw
- GUT-Prodís number: 94EFCC68


			
363 LRV: 4,25	273 LRV: 9,24	159 LRV: 27,58	685 LRV: 5,45
			
989 LRV: 3,36	848 LRV: 5,84	789 LRV: 16,58	975 LRV: 21,79
			
959 LRV: 6,99	569 LRV: 7,31	545 LRV: 16,41	911 LRV: 18,20

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space

959

911

989

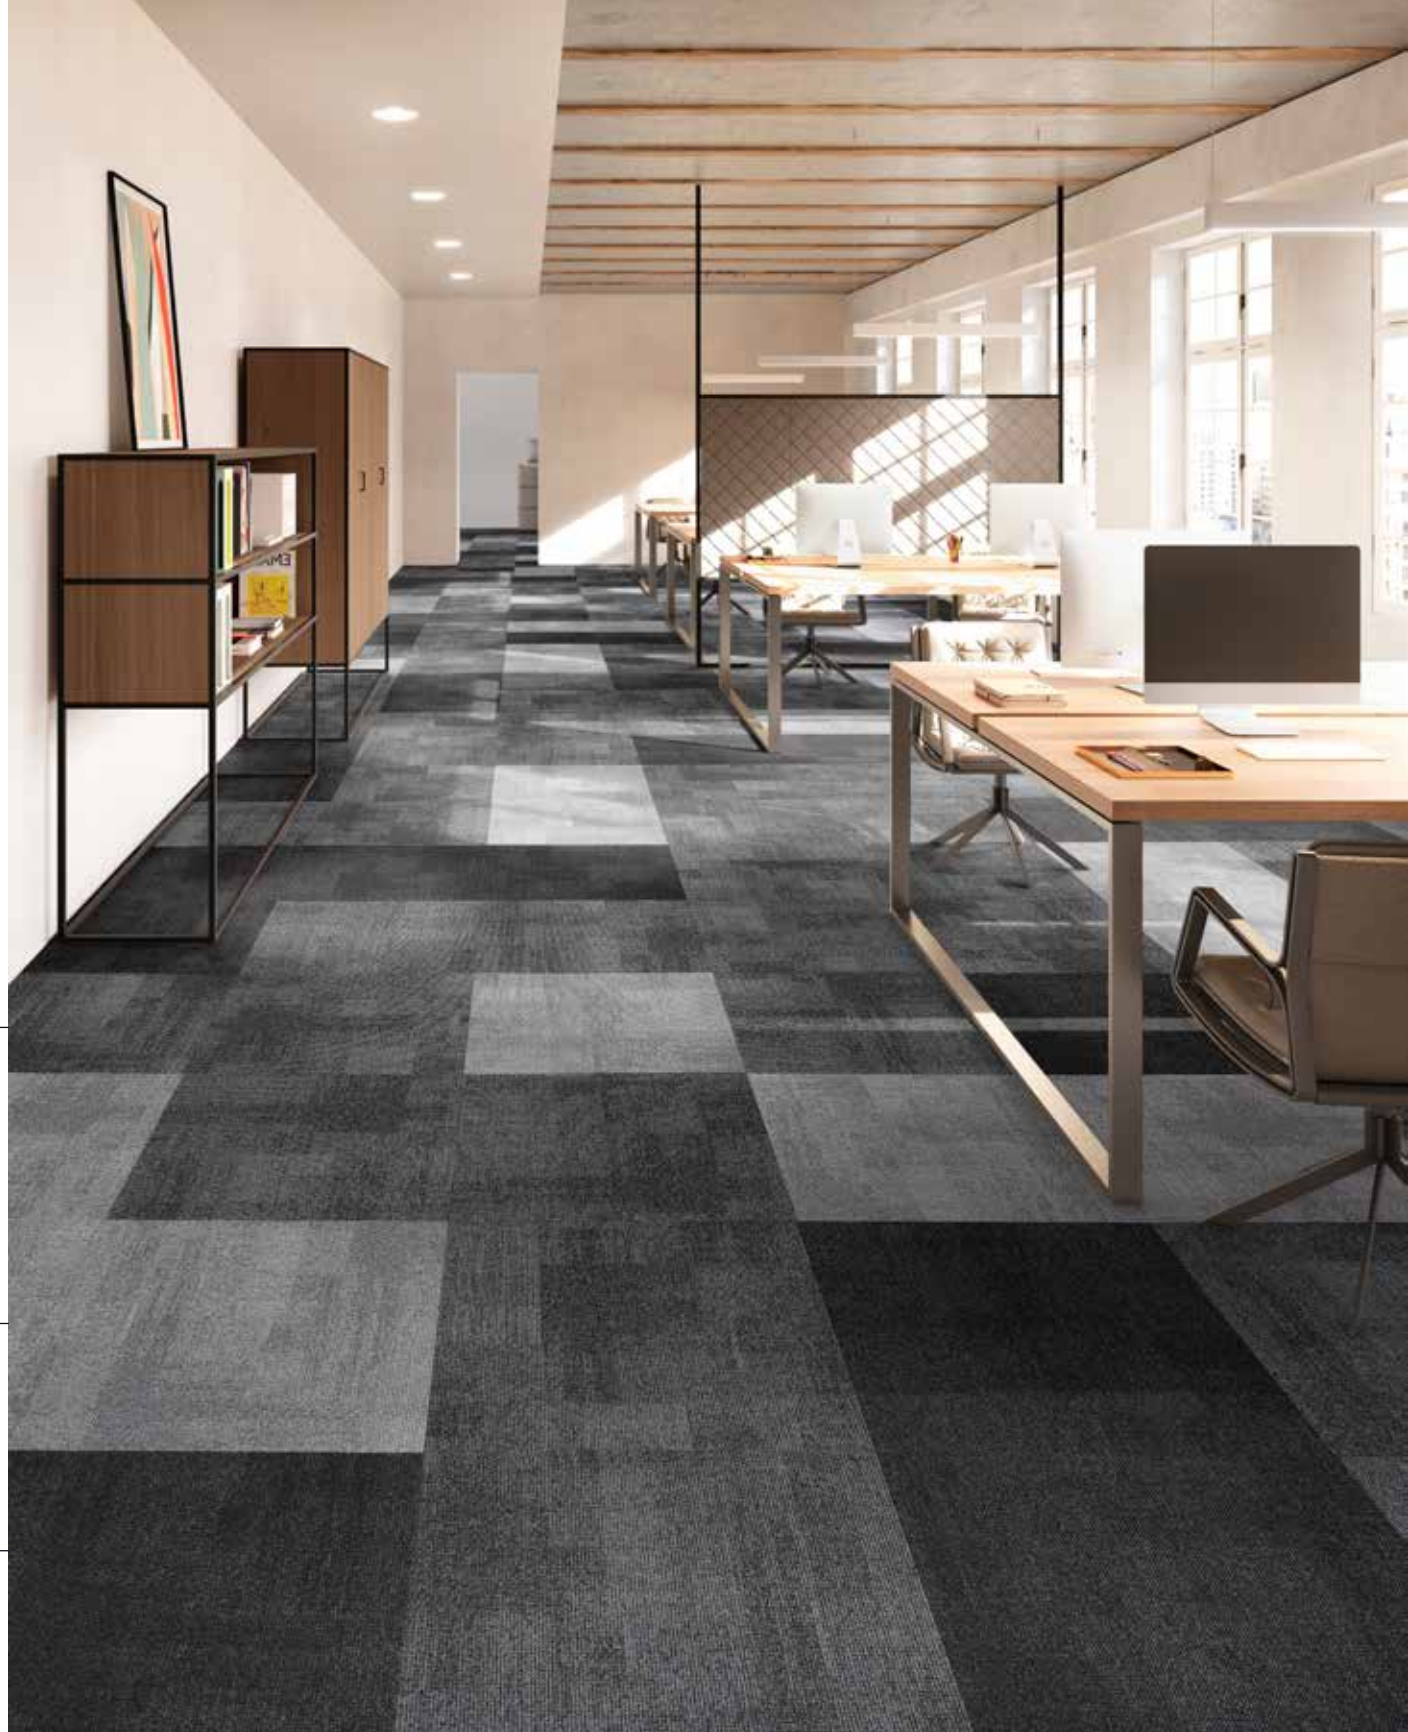

Teak

Rudiments

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% solution dyed nylon
- Dimensions - m²/box: 50 x 50 cm - 5 m²
- Pile weight: ± 600 g/m²
- Pile thickness: ± 2,9 mm
- Total thickness: ± 6,4 mm
- Wear classification: 33 / LC1
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 28 dB
- Sound absorption: 0,15 αw
- GUT-Prodís number: AB56D646

363	273	159	685
LRV: 4,25	LRV: 9,24	LRV: 27,58	LRV: 5,45
989	848	789	975
LRV: 3,36	LRV: 5,84	LRV: 16,58	LRV: 21,79
959	569	545	911
LRV: 6,99	LRV: 7,31	LRV: 16,41	LRV: 18,20

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space



911 - 975

Clay

Rudiments

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% solution dyed nylon
- Dimensions - m²/box: 25 x 100 cm - 5 m²
- Pile weight: ± 600 g/m²
- Pile thickness: ± 3,4 mm
- Total thickness: ± 7,1 mm
- Wear classification: 33 / LC1
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 28 dB
- Sound absorption: 0,15 αw
- GUT-Prodís number: E4C2F79C



975 LRV: 23,93 - L 54,94



685 LRV: 5,19 - L 26,48



789 LRV: 15,48 - L 49,29



569 LRV: 8,75 - L 39,11



848 LRV: 6,41 - L 28,26



545 LRV: 16,32 - L 49,28



988 LRV: 2,70 - L 20,68



911 LRV: 22,14 - L 49,80



363 LRV: 3,76 - L 21,08



959 LRV: 8,92 - L 29,14



273 LRV: 8,08 - L 34,74



989 LRV: 3,40 - L 23,02

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space



955 - 977 - 979

Clay Create Rudiments

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% solution dyed nylon
- Dimensions - m²/box: 25 x 100 cm - 5 m²
- Pile weight: ± 600 g/m²
- Pile thickness: ± 3,4 mm
- Total thickness: ± 7,1 mm
- Wear classification: 33 / LC1
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 28 dB
- Sound absorption: 0,15 αw
- GUT-Prodís number: 5E8698AB



977 LRV: 23,40 - L 54,85



699 LRV: 3,14 - L 22,84



872 LRV: 12,76 - L 39,73



599 LRV: 3,03 - L 27,35



887 LRV: 2,97 - L 20,00



556 LRV: 11,63 - L 39,77



987 LRV: 5,01 - L 21,47



594 LRV: 16,70 - L 52,41



339 LRV: 3,48 - L 23,56



955 LRV: 10,18 - L 36,61



325 LRV: 7,46 - L 35,11



979 LRV: 4,79 - L 29,01

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space



Clay 569

Metallic Clay
559 - 919



Metallic Clay

Rudiments

- Construction: tufted 1/12" gauge loop
- Backing: EcoFlex™ Statera
- Pile material: 100% solution dyed nylon
- Dimensions - m²/box: 25 x 100 cm - 5 m²
- Pile weight: ± 600 g/m²
- Pile thickness: ± 3,4 mm
- Total thickness: ± 7,1 mm
- Wear classification: 33 / LC1
- Fire classification: Bfl-s1
- Impact sound reduction: $\Delta L_w = 26$ dB
- Sound absorption: 0,20 α_w
- GUT-Prodís number: 9ADE6ED5

Mohawk Group - Product Catalogue

Metallic Clay



778

LRV: 15,86 - L 46,79



964

LRV: 20,12 - L 51,96



845

LRV: 8,28 - L 34,55



919

LRV: 18,19 - L 49,73



984

LRV: 5,97 - L 29,32



559

LRV: 10,87 - L 39,36



985

LRV: 5,56 - L 28,27



648

LRV: 5,12 - L 27,08



947

LRV: 8,98 - L 55,95

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space




Step Up

- Construction: 5/32" Tip Sheared
- Backing: EcoFlex™ NXT
- Pile material: 100% Duracolor® Premium Nylon (30% recycled content)
- Dimensions - m²/box: 60,96 cm x 60,96 cm - 5,2 m²
- Pile weight: ± 1288 g/m²
- Pile thickness: ± 5,2 mm
- Total thickness: ± 9 mm
- Wear classification: 33 / LC3
- Fire classification: Bfl-s1
- Impact sound reduction: ΔLw = 29dB
- Sound absorption: In progress
- GUT-Prodís number: In progress




955 LRV: 5,16



989 LRV: 2,51



859 LRV: 4,52



983 LRV: 3,20

LRV = Light Reflectance Value according to BS 8493, L = according to CIE L*a*b* colour space





Innovative secondary backing

EcoFlex™ Echo


Backing every flooring project

At Mohawk Group we believe everyone is entitled to better acoustics and ergonomic comfort. That's why we've developed a superior backing that considers acoustic insulation, sound absorption and underfoot comfort.

So, when there's need for specific technical requirements regarding the acoustics of a space, EcoFlex™ Echo provides the answer.

Offering improved levels of impact sound reduction and sound absorption, EcoFlex™ Echo carpet tiles are built to last. Tested in accordance with the EN1307 standard, EcoFlex™ Echo delivers high quality in all aspects, from dimensional stability and burning behaviour to a perfect seam finish.

Standard Mohawk Group Carpet Tiles with the EcoFlex™ Statera backing system are also developed with attention to acoustic properties. They offer a qualitative solution for projects where no specific values are required.

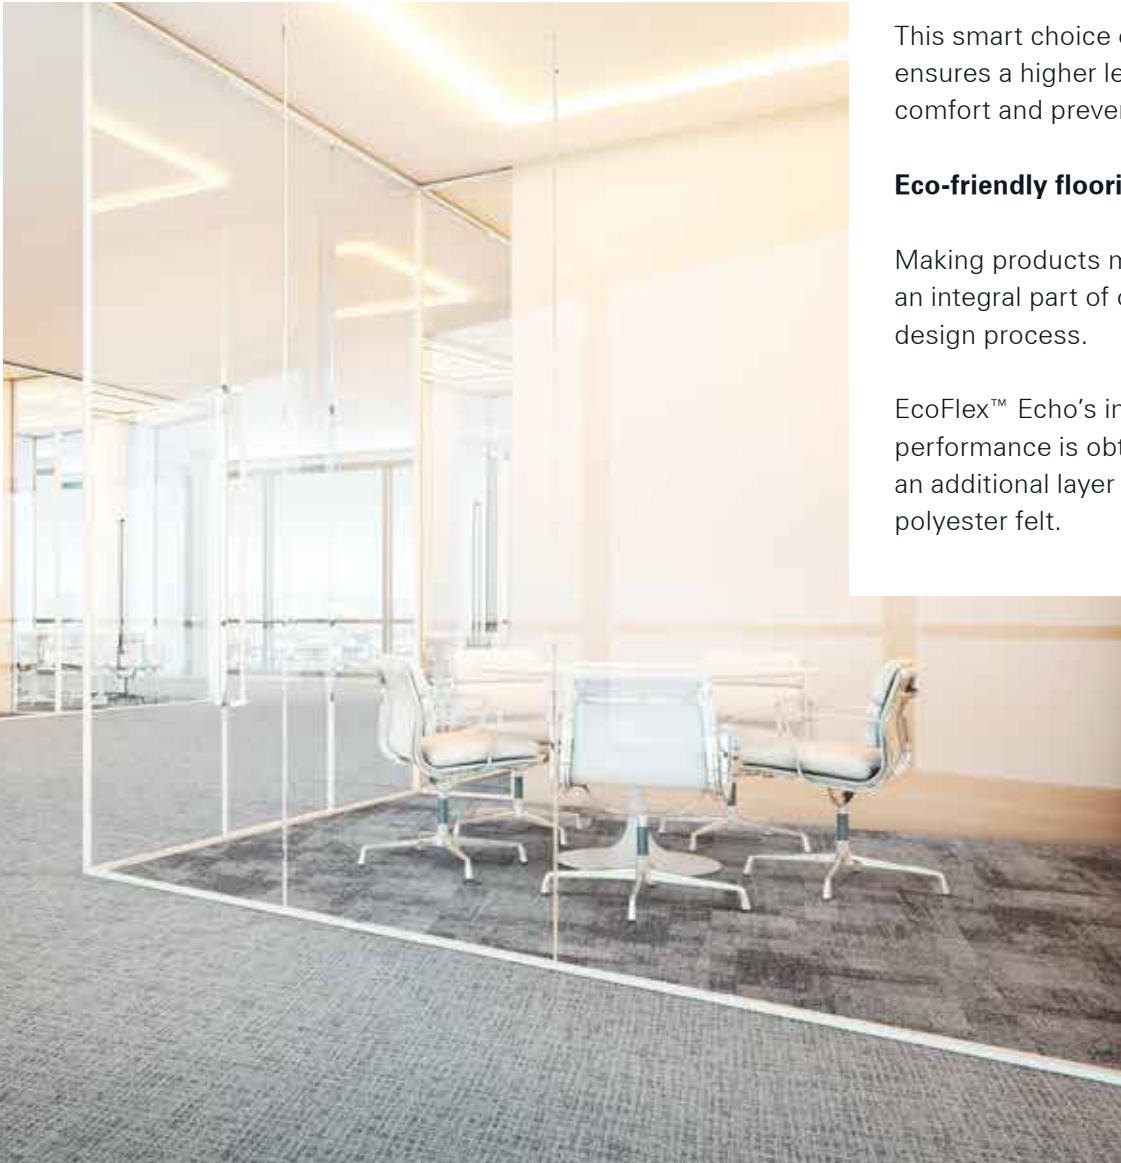

Going beyond acoustics

Composed for improved comfort

Dedicated to the future of flooring and the lasting comfort of our customers, we are continuously committed to ensuring the long-term quality of our products.

This smart choice of material also ensures a higher level of underfoot comfort and prevents muscle fatigue.

Eco-friendly flooring

Making products more sustainable is an integral part of our innovation and design process.

EcoFlex™ Echo's improved acoustic performance is obtained through an additional layer of 94% recycled polyester felt.

Improved performance and underfoot comfort is obtained through a **94% recycled polyester felt** layer





Easy installation

Flawless combinations


Finding the right floor for your project is one thing, but installing it can be a cumbersome process. Not to worry: Mohawk Group hands you the tools to ease this step.




FlexLok

The innovative FlexLok system is the ideal alternative to traditional adhesive installation methods. The odorless dry technique virtually eliminates harmful VOCs and can be used on all underlays, for all Mohawk Group Carpet Tiles. Rely on FlexLok for a fast, easy installation of flexible, floating floors, without any glue.

Installing planks




Lay the first row of planks and put FlexLok pads at each joint, adhesive side up. Install the remaining carpet tiles, placing FlexLok tabs as illustrated in the image.




For herringbone designs, put FlexLok pads on each corner, adhesive side up.

Installing tiles



Quarter turn, monolithic, and multi-directional
Put FlexLok pads at each corner of the tiles, adhesive side up.



Brick and Ashlar
Lay the first row of planks and put FlexLok pads at each joint, adhesive side up. Install the remaining carpet tiles, placing FlexLok tabs as illustrated in the image.



How we strive to make an impact on well-being

We are committed to enhancing well-being for everyone connected to our products, from designers and installers to end-users, next to our own personnel. Our focus on well-being ensures that our carpet tiles not only adorn spaces but contribute to a healthier and more harmonious environment.

Through our products



Underfoot Comfort

Recognizing the significant impact of underfoot comfort on overall employee well-being, we have pioneered a method to objectively assess and differentiate products based on their comfort levels. Herewith reducing muscle fatigue and promoting a healthier, more comfortable workplace.



Acoustics

Acoustics are essential for a well-balanced space. Our EcoFlex™ Echo carpet tile backing showcases our dedication to wellbeing through superior impact sound insulation and improved sound absorption.



Indoor Air Quality

Recognizing the importance of indoor air quality in interior environments, our carpet tiles adhere to some of the strictest indoor emission labels, thereby mitigating health risks for end-users.

Through our Culture

01. Zero Harm

The health and safety of all our employees is paramount in all our activities. We aim to be a zero-harm company, with a positive culture, where everyone takes care of each other and safety is ingrained in all our activities.

02. Well-being and health at work

Our workplace is a second home to our employees. We aim to create a positive, stimulating and safe working environment where people feel comfortable and appreciated.

03. Lifelong learning

We are convinced that the growth of our company hinges on the growth of our employees. We therefore anchor lifelong learning at the core of our talent management.





Get in touch

Want to learn more about Mohawk Group commercial flooring solutions, or need help tackling an exciting project? We've got you covered.

Go to **mohawkgroup.eu** to browse our collections, order samples, download inspirational brochures or stop by one of our showrooms. You can also make an appointment with our dedicated team by sending us an email via **info@mohawkgroup.eu**. Get in touch!

Follow us on    



Technical Specifications

Spécifications techniques - Technische specificaties - Technische Spezifikationen

Construction Structure - Structuur - Konstruktion	
Pile fibre composition Composition des fibres - Poolmateriaal - Material der Polnutzschicht	
Secondary backing Envers - Rug - Beschichtung	
Total weight Poids total - Totaal gewicht - Gesamtgewicht	
Pile weight Poids du velours - Poolgewicht - Poleinsatzgewicht	
Surface pile weight Poids du velours utile - Effectieve poolmassa - Polnutzschichtgewicht	
Total thickness Epaisseur totale - Totale dikte - Gesamtdicke	
Surface pile thickness Hauteur du velours - Poolhoogte - Poldicke	
Surface pile density Densité du velours - Pooldichtheid - Polrohdichte	
Number of tufts Nombre de boucles - Aantal noppen - Noppenzahl	
Wear classification Classement d'usage - Gebruiksklasse - Beanspruchungsklasse	EN 1307
Castor chair suitability Résistance aux chaises à roulettes - Rolstoelgeschiktheid - Stuhlrolleneignung	EN 985
Fire classification Comportement au feu - Brandgedrag - Brandklasse	EN 13501-1
Dimensional stability Stabilité dimensionnelle - Dimensionele stabiliteit - Dimensionsstabilität	EN 986
Colour fastness to light Solidité des couleurs à la lumière - Lichtbestendigheid van de kleuren - Lichtechtheit	EN ISO 105-B02
Rubbing fastness Solidité au frottement - Wrijfechtheid - Reibechtheit	EN ISO 105-X12
Colour fastness to water Solidité à l'eau - Waterechtheid - Wasserechtheit	EN ISO 105-E01
Thermal resistance Résistance thermique - Warmtedoorlaatweerstand - Wärmedurchlasswiderstand	ISO 8302
Sound absorption Absorption phonique - Geluidsabsorptie - Schallabsorptionsgrad	EN ISO 354
Impact sound reduction Réduction phonique aux bruits d'impacts - Reductie contactgeluid - Trittschallverbesserungsmaß	EN ISO 10140-3
Permanent antistatic Antistatique permanent - Permanent antistatisch - Permanent antistatisch	ISO 6356
Number of colours Nombre de coloris - Aantal kleuren - Anzahl der Farben	
Size & Packaging Dimensions & Emballage - Formaat en verpakking - Abmessungen & Verpackung	
GUT-Prodis Number Numéro GUT Prodis - Nummer GUT Prodis - GUT-Prodis Nummer	
Warranty years Garantie ans - Garantie in jaren - Garantie Jahren	



Tufted 1/10" gauge loop	
100% solution dyed nylon	
EcoFlex™ Statera (modified bitumen, 70% recycled content)	
± 4100 g/m²	
± 540 g/m²	
± 370 g/m²	
± 6,3 mm	
± 3,1 mm	
± 0,119 g/cm³	
176.300/ m²	
33 / LC1	
A: intensive use	
Bfl-s1	
≤ 0,20%	
≥ 7	
≥ 4	
≥ 4	
0,072 m².K/W	
0,15 aw	
Hz 125 250 500 1000 2000 4000 as -0,01 0,00 0,06 0,17 0,25 0,34	
ΔLw = 32 dB	
≤ 2 kV	
32	
50 x 50 cm 5 m²/box - 24 boxes/pallet	
3AA1D4DF	
15	

Expansion Point

Tufted 1/10" gauge loop	
100% solution dyed nylon	
EcoFlex™ Statera (modified bitumen, 70% recycled content)	
± 4300 g/m²	
± 540 g/m²	
± 401 g/m²	
± 6,6 mm	
± 3,3 mm	
± 0,123 g/cm³	
172.200/ m²	
33 / LC2	
A: intensive use	
Bfl-s1	
≤ 0,2%	
≥ 7	
≥ 4	
≥ 4	
0,0687 m².K/W	
0,15 aw	
Hz 125 250 500 1000 2000 4000 as -0,03 0,07 0,06 0,18 0,37 0,44	
ΔLw = 27 dB	
≤ 2 kV	
12	
50 x 50 cm 5 m²/box - 24 boxes/pallet	
F6619831	
15	

Blurred Edge

Tufted 1/10" gauge loop	
100% solution dyed nylon	
EcoFlex™ Statera (modified bitumen, 70% recycled content)	
± 5000 g/m²	
± 540 g/m²	
± 310 g/m²	
± 6,6 mm	
± 2,5 mm	
± 0,124 g/cm³	
168.100/m²	
33 / LC1	
A: intensive use	
Bfl-s1	
≤ 0,2%	
≥ 7	
≥ 4	
≥ 4	
0,0643 m².K/w	
0,15 aw	
Hz 125 250 500 1000 2000 4000 aw 0,02 0,03 0,06 0,19 0,31 0,37	
ΔLw = 25 dB	
≤ 2 kV	
10	
50 x 50 cm 5 m²/box - 24 boxes/pallet	
Ongoing	
15	

Technical Specifications

Spécifications techniques - Technische specificaties - Technische Spezifikationen

Construction Structure - Structuur - Konstruktion	
Pile fibre composition Composition des fibres - Poolmateriaal - Material der Polnutschicht	
Secondary backing Envers - Rug - Beschichtung	
Total weight Poids total - Totaal gewicht - Gesamtgewicht	
Pile weight Poids du velours - Poolgewicht - Poleinsatzgewicht	
Surface pile weight Poids du velours utile - Effectieve poolmassa - Polnutschichtgewicht	
Total thickness Epaisseur totale - Totale dikte - Gesamtdicke	
Surface pile thickness Hauteur du velours - Poolhoogte - Poldicke	
Surface pile density Densité du velours - Pooldichtheid - Polrohdichte	
Number of tufts Nombre de boucles - Aantal noppen - Noppenzahl	
Wear classification Classement d'usage - Gebruiksklasse - Beanspruchungsklasse	EN 1307
Castor chair suitability Résistance aux chaises à roulettes - Rolstoelgeschiktheid - Stuhlrolleneignung	EN 985
Fire classification Comportement au feu - Brandgedrag - Brandklasse	EN 13501-1
Dimensional stability Stabilité dimensionnelle - Dimensionele stabiliteit - Dimensionsstabilität	EN 986
Colour fastness to light Solidité des couleurs à la lumière - Lichtbestendigheid van de kleuren - Lichtechtheit	EN ISO 105-B02
Rubbing fastness Solidité au frottement - Wrijfechtheid - Reibechtheit	EN ISO 105-X12
Colour fastness to water Solidité à l'eau - Waterechtheid - Wasserechtheit	EN ISO 105-E01
Thermal resistance Résistance thermique - Warmtedoorlaatweerstand - Wärmedurchlasswiderstand	ISO 8302
Sound absorption Absorption phonique - Geluidsabsorptie - Schallabsorptionsgrad	EN ISO 354
Impact sound reduction Réduction phonique aux bruits d'impacts - Reductie contactgeluid - Trittschallverbesserungsmaß	EN ISO 10140-3
Permanent antistatic Antistatique permanent - Permanent antistatisch - Permanent antistatisch	ISO 6356
Number of colours Nombre de coloris - Aantal kleuren - Anzahl der Farben	
Size & Packaging Dimensions & Emballage - Formaat en verpakking - Abmessungen & Verpackung	
GUT-Prodis Number Numéro GUT Prodis - Nummer GUT Prodis - GUT-Prodis Nummer	
Warranty years Garantie ans - Garantie in jaren - Garantie Jahren	

Perspective

Tufted 1/12" gauge loop
100% solution dyed nylon
EcoFlex™ Statera (modified bitumen, 70% recycled content)
± 4400 g/m²
± 600 g/m²
± 380 g/m²
± 6,4 mm
± 3,1 mm
± 0,123 g/cm³
209.100/m²
33 / LC1
A: intensive use
Bfl-s1
≤ 0,2%
≥ 7
≥ 4
≥ 4
0,068 m².K/W
0,15 αw
Hz 125 250 500 1000 2000 4000 αs 0,00 0,02 0,06 0,20 0,33 0,42
ΔLw = 25 dB
≤ 2 kV
8
50 x 50 cm 5 m²/box - 24 boxes/pallet
6119BCAA
15

View

Tufted 1/12" gauge loop
100% solution dyed nylon
EcoFlex™ Statera (modified bitumen, 70% recycled content)
± 4400 g/m²
± 600 g/m²
± 388 g/m²
± 6,4 mm
± 3,1 mm
± 0,125 g/cm³
229.500/m²
33 / LC1
A: intensive use
Bfl-s1
≤ 0,2%
≥ 7
≥ 4
≥ 4
0,067 m².K/W
0,15 αw
Hz 125 250 500 1000 2000 4000 αs 0,00 0,02 0,06 0,20 0,30 0,39
ΔLw = 25 dB
≤ 2 kV
8
50 x 50 cm 5 m²/box - 24 boxes/pallet
CAC6CFE5
15

Step Up

5/32" Tip Sheared
100% Duracolor® Premium Nylon (30% recycled content)
EcoFlex™ NXT
± 4575 g/m²
± 1288 g/m²
± 754 g/m²
± 9 mm
± 5,2 mm
± 0,145 g/cm³
93.600/m²
33 / LC3
A: intensive use
Bfl-s1
≤ 0,2%
≥ 7
≥ 4
≥ 4
0,099 m².K/W
In progress
ΔLw = 29dB
≤ 2 kV
4
60,96 cm x 60,96 cm (24"x24") 5,2 m²/box
Ongoing
15



Technical Specifications

Spécifications techniques - Technische specificaties - Technische Spezifikationen

Construction Structure - Structuur - Konstruktion	
Pile fibre composition Composition des fibres - Poolmateriaal - Material der Polnutzschicht	
Secondary backing Envers - Rug - Beschichtung	
Total weight Poids total - Totaal gewicht - Gesamtgewicht	
Pile weight Poids du velours - Poolgewicht - Poleinsatzgewicht	
Surface pile weight Poids du velours utile - Effectieve poolmassa - Polnutzschichtgewicht	
Total thickness Epaisseur totale - Totale dikte - Gesamtdicke	
Surface pile thickness Hauteur du velours - Poolhoogte - Poldicke	
Surface pile density Densité du velours - Pooldichtheid - Polrohdichte	
Number of tufts Nombre de boucles - Aantal noppen - Noppenzahl	
Wear classification Classement d'usage - Gebruiksklasse - Beanspruchungsklasse	EN 1307
Castor chair suitability Résistance aux chaises à roulettes - Rolstoelgeschiktheid - Stuhlrolleneignung	EN 985
Fire classification Comportement au feu - Brandgedrag - Brandklasse	EN 13501-1
Dimensional stability Stabilité dimensionnelle - Dimensionele stabiliteit - Dimensionsstabilität	EN 986
Colour fastness to light Solidité des couleurs à la lumière - Lichtbestendigheid van de kleuren - Lichtechtheit	EN ISO 105-B02
Rubbing fastness Solidité au frottement - Wrijfechtheid - Reibechtheit	EN ISO 105-X12
Colour fastness to water Solidité à l'eau - Waterechtheid - Wasserechtheit	EN ISO 105-E01
Thermal resistance Résistance thermique - Warmtedoorlaatweerstand - Wärmedurchlasswiderstand	ISO 8302
Sound absorption Absorption phonique - Geluidsabsorptie - Schallabsorptionsgrad	EN ISO 354
Impact sound reduction Réduction phonique aux bruits d'impacts - Reductie contactgeluid - Trittschallverbesserungsmaß	EN ISO 10140-3
Permanent antistatic Antistatique permanent - Permanent antistatisch - Permanent antistatisch	ISO 6356
Number of colours Nombre de coloris - Aantal kleuren - Anzahl der Farben	
Size & Packaging Dimensions & Emballage - Formaat en verpakking - Abmessungen & Verpackung	
GUT-Prodis Number Numéro GUT Prodis - Nummer GUT Prodis - GUT-Prodis Nummer	
Warranty years Garantie ans - Garantie in jaren - Garantie Jahren	



Balanced	Tailored	Unchained
Tufted 1/12" gauge loop	Tufted 1/12" gauge loop	Tufted 1/12" gauge loop
100% SDN Thrive® Matter (90% recycled content)	100% SDN Thrive® Matter (90% recycled content)	100% SDN Thrive® Matter (90% recycled content)
EcoFlex™ Statera (modified bitumen, 70% recycled content)	EcoFlex™ Statera (modified bitumen, 70% recycled content)	EcoFlex™ Statera (modified bitumen, 70% recycled content)
+/- 4400 g/m²	+/- 4400 g/m²	+/- 4400 g/m²
+/- 720 g/m²	+/- 720 g/m²	+/- 720 g/m²
+/- 466 g/m²	+/- 474 g/m²	+/- 511 g/m²
+/- 7,0 mm	+/- 6,9 mm	+/- 7,1 mm
+/- 3,5 mm	+/- 3,7 mm	+/- 3,4 mm
+/- 0,133 g/cm³	+/- 0,128 g/cm³	+/- 0,150 g/cm³
230.000/m²	230.000/m²	244.800/m²
33 / LC2	33 / LC2	33 / LC2
A: intensive use	A: intensive use	A: intensive use
Bfl-s1	Bfl-s1	Bfl-s1
≤ 0,2%	≤ 0,2%	≤ 0,2%
≥ 7	≥ 7	≥ 7
≥ 4	≥ 4	≥ 4
≥ 4	≥ 4	≥ 4
0,070 m².K/W	0,080 m².K/W	0,080 m².K/W
0,20 aw	0,20 aw	0,20 aw
Hz as1250,002500,025000,0710000,1920000,2940000,41	Hz as1250,002500,025000,0710000,1920000,2940000,41	Hz as1250,002500,025000,0710000,1920000,2940000,41
ΔLw = 25 dB	ΔLw = 25 dB	ΔLw = 25 dB
≤ 2 kV	≤ 2 kV	≤ 2 kV
16	16	16
50 x 50 cm 4,5 m²/box - 24 boxes/pallet	50 x 50 cm 4,5 m²/box - 24 boxes/pallet	50 x 50 cm 4,5 m²/box - 24 boxes/pallet
Ongoing	Ongoing	Ongoing
15	15	15

Technical Specifications

Spécifications techniques - Technische specificaties - Technische Spezifikationen

Construction Structure - Structuur - Konstruktion	
Pile fibre composition Composition des fibres - Poolmateriaal - Material der Polnutzschicht	
Secondary backing Envers - Rug - Beschichtung	
Total weight Poids total - Totaal gewicht - Gesamtgewicht	
Pile weight Poids du velours - Poolgewicht - Poleinsatzgewicht	
Surface pile weight Poids du velours utile - Effectieve poolmassa - Polnutzschichtgewicht	
Total thickness Epaisseur totale - Totale dikte - Gesamtdicke	
Surface pile thickness Hauteur du velours - Poolhoogte - Poldicke	
Surface pile density Densité du velours - Pooldichtheid - Polrohdichte	
Number of tufts Nombre de boucles - Aantal noppen - Noppenzahl	
Wear classification Classement d'usage - Gebruiksklasse - Beanspruchungsklasse	EN 1307
Castor chair suitability Résistance aux chaises à roulettes - Rolstoelgeschiktheid - Stuhlrolleneignung	EN 985
Fire classification Comportement au feu - Brandgedrag - Brandklasse	EN 13501-1
Dimensional stability Stabilité dimensionnelle - Dimensionele stabiliteit - Dimensionsstabilität	EN 986
Colour fastness to light Solidité des couleurs à la lumière - Lichtbestendigheid van de kleuren - Lichtechtheit	EN ISO 105-B02
Rubbing fastness Solidité au frottement - Wrijfechtheid - Reibechtheit	EN ISO 105-X12
Colour fastness to water Solidité à l'eau - Waterechtheid - Wasserechtheit	EN ISO 105-E01
Thermal resistance Résistance thermique - Warmtedoorlaatweerstand - Wärmedurchlasswiderstand	ISO 8302
Sound absorption Absorption phonique - Geluidsabsorptie - Schallabsorptionsgrad	EN ISO 354
Impact sound reduction Réduction phonique aux bruits d'impacts - Reductie contactgeluid - Trittschallverbesserungsmaß	EN ISO 10140-3
Permanent antistatic Antistatique permanent - Permanent antistatisch - Permanent antistatisch	ISO 6356
Number of colours Nombre de coloris - Aantal kleuren - Anzahl der Farben	
Size & Packaging Dimensions & Emballage - Formaat en verpakking - Abmessungen & Verpackung	
GUT-Prodis Number Numéro GUT Prodis - Nummer GUT Prodis - GUT-Prodis Nummer	
Warranty years Garantie ans - Garantie in jaren - Garantie Jahren	

Alternate	Liberate	Animate
Tufted 1/12" gauge loop	Tufted 1/12" gauge loop	Tufted 1/12" gauge loop
100% SDN Thrive® Matter (90% recycled content)	100% SDN Thrive® Matter (90% recycled content)	100% SDN Thrive® Matter (90% recycled content)
EcoFlex™ Statera (modified bitumen, 70% recycled content)	EcoFlex™ Statera (modified bitumen, 70% recycled content)	EcoFlex™ Statera (modified bitumen, 70% recycled content)
± 4500 g/m²	± 4500 g/m²	± 4500 g/m²
± 700 g/m²	± 700 g/m²	± 700 g/m²
± 484 g/m²	± 489 g/m²	± 433 g/m²
± 7,0 mm	± 7,3 mm	± 7,2 mm
± 3,4 mm	± 3,6 mm	± 3,3 mm
± 0,142 g/cm³	± 0,136 g/cm³	± 0,132 g/cm³
224.400/m²	234.600/m²	234.600/m²
33 / LC2	33 / LC2	33 / LC2
A: intensive use	A: intensive use	A: intensive use
Bfl-s1	Bfl-s1	Bfl-s1
≤ 0,2%	≤ 0,2%	≤ 0,2%
≥ 7	≥ 7	≥ 7
≥ 4	≥ 4	≥ 4
≥ 4	≥ 4	≥ 4
0,072 m².K/W	0,075 m².K/W	0,068 m².K/W
0,15 αw	0,15 αw	0,15 αw
Hz 125 250 500 1000 2000 4000 αs -0,01 0,02 0,06 0,20 0,32 0,48	Hz 125 250 500 1000 2000 4000 αs 0,00 0,03 0,06 0,21 0,34 0,54	Hz 125 250 500 1000 2000 4000 αs 0,00 0,02 0,06 0,20 0,30 0,47
ΔLw = 24 dB	ΔLw = 25 dB	ΔLw = 24 dB
≤ 2 kV	≤ 2 kV	≤ 2 kV
18	18	18
50 x 50 cm 4,5 m²/box - 24 boxes/pallet	50 x 50 cm 4,5 m²/box - 24 boxes/pallet	50 x 50 cm 4,5 m²/box - 24 boxes/pallet
Ongoing	Ongoing	Ongoing
15	15	15



Technical Specifications

Spécifications techniques - Technische specificaties - Technische Spezifikationen

Construction Structure - Structuur - Konstruktion	
Pile fibre composition Composition des fibres - Poolmateriaal - Material der Polnutschicht	
Secondary backing Envers - Rug - Beschichtung	
Total weight Poids total - Totaal gewicht - Gesamtgewicht	
Pile weight Poids du velours - Poolgewicht - Poleinsatzgewicht	
Surface pile weight Poids du velours utile - Effectieve poolmassa - Polnutschichtgewicht	
Total thickness Epaisseur totale - Totale dikte - Gesamtdicke	
Surface pile thickness Hauteur du velours - Poolhoogte - Poldicke	
Surface pile density Densité du velours - Pooldichtheid - Polrohdichte	
Number of tufts Nombre de boucles - Aantal noppen - Noppenzahl	
Wear classification Classement d'usage - Gebruiksklasse - Beanspruchungsklasse	EN 1307
Castor chair suitability Résistance aux chaises à roulettes - Rolstoelgeschiktheid - Stuhlrolleneignung	EN 985
Fire classification Comportement au feu - Brandgedrag - Brandklasse	EN 13501-1
Dimensional stability Stabilité dimensionnelle - Dimensionele stabiliteit - Dimensionsstabilität	EN 986
Colour fastness to light Solidité des couleurs à la lumière - Lichtbestendigheid van de kleuren - Lichtechtheit	EN ISO 105-B02
Rubbing fastness Solidité au frottement - Wrijfechtheid - Reibechtheit	EN ISO 105-X12
Colour fastness to water Solidité à l'eau - Waterechtheid - Wasserechtheit	EN ISO 105-E01
Thermal resistance Résistance thermique - Warmtedoorlaatweerstand - Wärmedurchlasswiderstand	ISO 8302
Sound absorption Absorption phonique - Geluidsabsorptie - Schallabsorptionsgrad	EN ISO 354
Impact sound reduction Réduction phonique aux bruits d'impacts - Reductie contactgeluid - Trittschallverbesserungsmaß	EN ISO 10140-3
Permanent antistatic Antistatique permanent - Permanent antistatisch - Permanent antistatisch	ISO 6356
Number of colours Nombre de coloris - Aantal kleuren - Anzahl der Farben	
Size & Packaging Dimensions & Emballage - Formaat en verpakking - Abmessungen & Verpackung	
GUT-Prodis Number Numéro GUT Prodis - Nummer GUT Prodis - GUT-Prodis Nummer	
Warranty years Garantie ans - Garantie in jaren - Garantie Jahren	



Grit	Bruut	Rupture
1/12" Pattern Perfect®	1/12" Pattern Perfect®	1/12" Pattern Perfect®
ECONYL® 100% regenerated nylon	ECONYL® 100% regenerated nylon	ECONYL® 100% regenerated nylon
EcoFlex™ Echo (94% recycled felt)	EcoFlex™ Echo (94% recycled felt)	EcoFlex™ Echo (94% recycled felt)
± 5001 g/m²	± 5001 g/m²	± 5001 g/m²
± 750 g/m²	± 780 g/m²	± 780 g/m²
± 510 g/m²	± 498 g/m²	± 486 g/m²
± 8,6 mm	± 8,7 mm	± 8,7 mm
± 3,2 mm	± 3,3 mm	± 3,3 mm
± 0,159 g/cm³	± 0,151 g/cm³	± 0,147 g/cm³
± 132.080/ m²	± 132.080/ m²	± 132.080/ m²
33 / LC2	33 / LC2	33 / LC2
A: intensive use	A: intensive use	A: intensive use
Bfl-s1	Bfl-s1	Bfl-s1
≤ 0,2%	≤ 0,2%	≤ 0,2%
≥ 7	≥ 7	≥ 7
≥ 4	≥ 4	≥ 4
≥ 4	≥ 4	≥ 4
0,115 m².K/W	0,120 m².K/W	0,114 m².K/W
0,25 αw	0,30 αw	0,30 αw
Hz 125 250 500 1000 2000 4000 αs 0,00 0,03 0,43 0,20 0,28 0,39	Hz 125 250 500 1000 2000 4000 αs 0,00 0,03 0,33 0,25 0,36 0,55	Hz 125 250 500 1000 2000 4000 αs 0,01 0,03 0,37 0,24 0,35 0,55
ΔLw = 29 dB	ΔLw = 31 dB	ΔLw = 30 dB
≤ 2 kV	≤ 2 kV	≤ 2 kV
12	12	12
25 x 100 cm 4 m²/box - 24 boxes/pallet	25 x 100 cm 4 m²/box - 24 boxes/pallet	25 x 100 cm 4 m²/box - 24 boxes/pallet
Ongoing	Ongoing	Ongoing
15	15	15

Technical Specifications

Spécifications techniques - Technische specificaties - Technische Spezifikationen

Construction Structure - Structuur - Konstruktion	
Pile fibre composition Composition des fibres - Poolmateriaal - Material der Polnutschicht	
Secondary backing Envers - Rug - Beschichtung	
Total weight Poids total - Totaal gewicht - Gesamtgewicht	
Pile weight Poids du velours - Poolgewicht - Poleinsatzgewicht	
Surface pile weight Poids du velours utile - Effectieve poolmassa - Polnutschichtgewicht	
Total thickness Epaisseur totale - Totale dikte - Gesamtdicke	
Surface pile thickness Hauteur du velours - Poolhoogte - Poldicke	
Surface pile density Densité du velours - Pooldichtheid - Polrohdichte	
Number of tufts Nombre de boucles - Aantal noppen - Noppenzahl	
Wear classification Classement d'usage - Gebruiksklasse - Beanspruchungsklasse	EN 1307
Castor chair suitability Résistance aux chaises à roulettes - Rolstoelgeschiktheid - Stuhlrolleneignung	EN 985
Fire classification Comportement au feu - Brandgedrag - Brandklasse	EN 13501-1
Dimensional stability Stabilité dimensionnelle - Dimensionele stabiliteit - Dimensionsstabilität	EN 986
Colour fastness to light Solidité des couleurs à la lumière - Lichtbestendigheid van de kleuren - Lichtechtheit	EN ISO 105-B02
Rubbing fastness Solidité au frottement - Wrijfechtheid - Reibechtheit	EN ISO 105-X12
Colour fastness to water Solidité à l'eau - Waterechtheid - Wasserechtheit	EN ISO 105-E01
Thermal resistance Résistance thermique - Warmtedoorlaatweerstand - Wärmedurchlasswiderstand	ISO 8302
Sound absorption Absorption phonique - Geluidsabsorptie - Schallabsorptionsgrad	EN ISO 354
Impact sound reduction Réduction phonique aux bruits d'impacts - Reductie contactgeluid - Trittschallverbesserungsmaß	EN ISO 10140-3
Permanent antistatic Antistatique permanent - Permanent antistatisch - Permanent antistatisch	ISO 6356
Number of colours Nombre de coloris - Aantal kleuren - Anzahl der Farben	
Size & Packaging Dimensions & Emballage - Formaat en verpakking - Abmessungen & Verpackung	
GUT-Prodis Number Numéro GUT Prodis - Nummer GUT Prodis - GUT-Prodis Nummer	
Warranty years Garantie ans - Garantie in jaren - Garantie Jahren	

Flare	Reflect	Basalt	Jute
1/12" Pattern Perfect®	1/12" Pattern Perfect®	Tufted 1/12" gauge loop	Tufted 1/12" gauge loop
100% solution dyed nylon	100% solution dyed nylon	100% solution dyed nylon	100% solution dyed nylon
EcoFlex™ Statera (modified bitumen, 70% recycled content)	EcoFlex™ Statera (modified bitumen, 70% recycled content)	EcoFlex™ Statera (modified bitumen, 70% recycled content)	EcoFlex™ Statera (modified bitumen, 70% recycled content)
± 4000 g/m²	± 4000 g/m²	± 4400 g/m²	± 4400 g/m²
± 540 g/m²	± 540 g/m²	± 600 g/m²	± 600 g/m²
± 346 g/m²	± 313 g/m²	± 390 g/m²	± 415 g/m²
± 6,3 mm	± 6,1 mm	± 6,4 mm	± 6,4 mm
± 3,0 mm	± 3,0 mm	± 3,1 mm	± 3,2 mm
± 0,115 g/cm³	± 0,104 g/cm³	± 0,125 g/cm³	± 0,127 g/cm³
± 198.394/ m²	± 198.394/ m²	224.400/m²	224.400/m²
33 / LC1	33 / LC1	33 / LC1	33 / LC2
A: intensive use	A: intensive use	A: intensive use	A: intensive use
Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
≤ 0,2%	≤ 0,2%	≤ 0,2%	≤ 0,2%
≥ 7	≥ 7	≥ 7	≥ 7
≥ 4	≥ 4	≥ 4	≥ 4
≥ 4	≥ 4	≥ 4	≥ 4
0,070 m².K/W	0,068 m².K/W	0,066 m².K/w	0,069 m².K/W
0,15 αw	0,15 αw	0,15 αw	0,15 αw
Hz 125 250 500 1000 2000 4000 αs 0,00 0,03 0,06 0,16 0,27 0,36	Hz 125 250 500 1000 2000 4000 αs 0,00 0,02 0,06 0,16 0,28 0,37	Hz 125 250 500 1000 2000 4000 αw 0,02 0,03 0,08 0,16 0,29 0,33	Hz 125 250 500 1000 2000 4000 αw 0,02 0,02 0,07 0,16 0,29 0,33
ΔLw = 24 dB	ΔLw = 25 dB	ΔLw = 28 dB	ΔLw = 28 dB
≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV
8	8	12	12
50 x 50 cm 5 m²/box - 24 boxes/pallet	50 x 50 cm 5 m²/box - 24 boxes/pallet	50 x 50 cm 5 m²/box - 24 boxes/pallet	50 x 50 cm 5 m²/box - 24 boxes/pallet
Ongoing	Ongoing	65EB708B	94EFC68
		15	15



Teak	Clay	Clay Create	Metallic Clay
Tufted 1/12" gauge loop	Tufted 1/12" gauge loop	Tufted 1/12" gauge loop	Tufted 1/12" gauge loop
100% solution dyed nylon	100% solution dyed nylon	100% solution dyed nylon	100% solution dyed nylon
EcoFlex™ Statera (modified bitumen, 70% recycled content)	EcoFlex™ Statera (modified bitumen, 70% recycled content)	EcoFlex™ Statera (modified bitumen, 70% recycled content)	EcoFlex™ Statera (modified bitumen, 70% recycled content)
± 4400 g/m²	± 4495 g/m²	± 4495 g/m²	± 4495 g/m²
± 600 g/m²	± 600 g/m²	± 600 g/m²	± 600 g/m²
± 370 g/m²	± 384 g/m²	± 384 g/m²	± 384 g/m²
± 6,4 mm	± 7,1 mm	± 7,1 mm	± 7,1 mm
± 2,9 mm	± 3,4 mm	± 3,4 mm	± 3,4 mm
± 0,127 g/cm³	± 0,115 g/cm³	± 0,115 g/cm³	± 0,115 g/cm³
224.400/m²	205.000/ m²	205.000/ m²	205.000/m²
33 / LC1	33 / LC1	33 / LC1	33 / LC1
A: intensive use	A: intensive use	A: intensive use	A: intensive use
Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
≤ 0,2%	≤ 0,2%	≤ 0,2%	≤ 0,2%
≥ 7	≥ 7	≥ 7	≥ 7
≥ 4	≥ 4	≥ 4	≥ 4
≥ 4	≥ 4	≥ 4	≥ 4
0,065 m².K/W	0,076 m².K/W	0,076 m².K/W	0,076 m².K/W
0,15 αw	0,15 αw	0,15 αw	0,20 αw
Hz 125 250 500 1000 2000 4000 αw 0,01 0,03 0,07 0,16 0,29 0,33	Hz 125 250 500 1000 2000 4000 αs 0,02 0,03 0,07 0,19 0,34 0,57	Hz 125 250 500 1000 2000 4000 αs 0,02 0,03 0,07 0,19 0,34 0,57	Hz 125 250 500 1000 2000 4000 αs 0,02 0,02 0,08 0,21 0,32 0,45
ΔLw = 28 dB	ΔLw = 28 dB	ΔLw = 28 dB	ΔLw = 26 dB
≤ 2 kV	≤ 2 kV	≤ 2 kV	≤ 2 kV
12	12	12	9
50 x 50 cm 5 m²/box - 24 boxes/pallet	25 x 100 cm 5 m²/box - 24 boxes/pallet	25 x 100 cm 5 m²/box - 24 boxes/pallet	25 x 100 cm 5 m²/box - 24 boxes/pallet
AB56D646	E4C2F79C	5E8698AB	9ADE6ED5
15	15	15	15

Photographic images are not representative due to variations in colour printing.
The representative samples shown are sectional definitions. For full design representation, please visit the website.



